

**SPECIFICATION Product** 

Name: MM AI06 F

Screen: 4.3 Inch, HD 272"480, Capacitive

Touch Screen Operation system: LINUX 3.10

CPU.NPU: 1.2G Dual-Core ARM Cortex-A7, 600G

(0.6T)1GB RAM: 256MB DDR3 ROM: eMMC Flash

4GB

Binocular camera: 200W Colorful WDR+200W Infrared

live camera

**Face Recognition Accuracy:** 99.70%

**Recognition Distance:** 0.5-2.5 meters **Working** 

Style: Online/ Offline Prevent Photo: Dual

camera anti-counterfeiting prevents

recognition with photo/video

**USB:** USB2.0 x1, Supports U disk import/export

data **Power supply:** DC12V interface x 1 **Speaker** 

Interface: Reserved for extended Speaker

Interface Network Communication: TCP/IP

Support communication USB, LAN, WiFi

Free Attendance software: Support exporting


excel attendance report with U disk



Face




Fingerprint



Password



**RFID Card** 

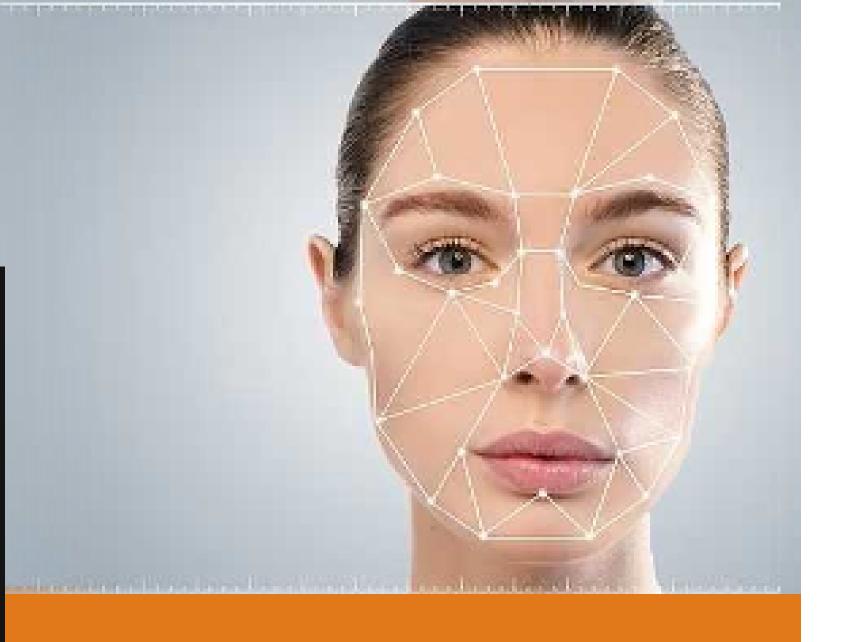

## FACE & FINGER

TA & PROFESSIONAL ACCESS CONTROL DEVICE

## **FEATURES**

- 4.3 -inch 272"480,
- Capacitive Touch Screen 200W
- Colorful WDR+200W Infrared live camera
- Adjusts supplement light brightness manually
- Face recognition in a dark environment
- Face recognition distance: 0.5 to 1.5m
- Deep learning algorithm 5,000 face capacity 10,000
- Finger and 5,00,000 Log capacity
- Multiple authentication modes
- Face recognition duration 0.25 seconds
- Stand-alone operation Transmits data to the client software via TCP/P Support LAN communication, USB
- WiFi & saves the data on the client software
- Capture linkage and captured pictures saving Imports
- data to the device from the client software Manage, search & set device data after logging in to the device locally



**MM AI-06 F** 

https://www.megamindindia.in/

